



CAP RETORQUER CVC 1208



The CVC 1208 In-Line Cap Retorquer is designed to retighten screw-on caps after induction sealing at speeds of up to 120 bottles per minute. The 1208 is Siemens PLC controlled. Options include tower lamp, servo torque metering, reject, and reject verification.

STANDARD FEATURES

- PLC Controlled
- Cap tightening station with 1 sets of spindles
- ISO 9001:2000 certified



CVC 1208 Technical Specifications

Speed	Up to 120 Bottles per Minute(BPM)
Cap Height	½" to 1 ½" (13mm - 37mm)
Cap Diameter	1 ⅛" to 4 ¼" (28mm - 108mm)
Bottle Height	2" to 8" (51mm to 200mm)
Bottle Diameter	1 ⅛" to 4 ½" (28mm - 114 mm) (maximum 7 ½" bottle diameter on a 6" wide conveyor)
Power Source	220V, 50/60 Hz, Single Phase
Power Consumption	3 Amp
Air Pressure	Minimum 85 psi (ISO 8573-1)
Air Consumption	3 cfm with rejection
Machine Dimensions	3'-8" x 3'-6" x 7'-5" (1115mm x 1071mm x 2264mm) (L x W x H)
Machine Weight	728 lbs. (330kg)
Noise Level	75 dB


TECHNICAL SPECIFICATIONS

AVAILABLE OPTIONS


- Motorized sanitary conveyor (6" wide belt available)
- Tower lamp, torque metering (servo motor)
- Rejection system, reject confirmation
- 21 CFR Part 11 License

MACHINE LAYOUTS

Top View



Front View

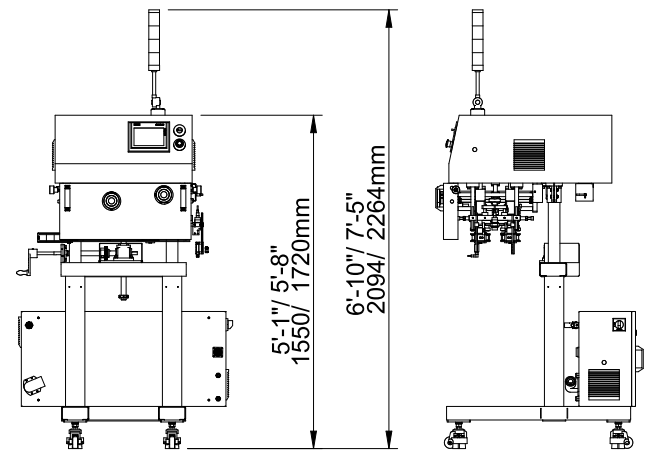

The dimensions shown are for standard machine. The conveyor can be extended: the length may vary based on selected options. This machine can run independently or be integrated into an automated packaging line. All CVC equipment is covered by a one-year parts warranty. Full Warranty details are included in our equipment proposals or can be found on our website.



Contact Us

USA
10861 Business Drive, Fontana, CA 92337
Phone: +1 (909) 355-0311
www.cvctechnologies.com
sales@cvcusa.com

USA East Coast Office
1855 New Highway, Suite C, Farmingdale NY 11735
sales@cvcusa.com

Taiwan-Asia Pacific Headquarters
Phone: +886 (4) 2496-3666
sales@cvctechnologies.com

China/India/Indonesia
sales@cvctechnologies.com